

### Specifications

#### Nominal Voltage(V)

12V

#### Nominal Power

15 mins rate: 35W/cell to 1.60V/cell

#### Nominal Capacity

|             |                    |         |
|-------------|--------------------|---------|
| 5 hour rate | (1.445A to 10.20V) | 7.225Ah |
| 1C          | (8.5A to 9.60V)    | 5.28Ah  |
| 3C          | (25.5A to 9.60V)   | 3.4Ah   |

#### Weight

Approx. 2.7kg(5.94Lbs.)

#### Internal Resistance (at 1KHz)

Approx. 14 mΩ

#### Maximum Discharge Current for

5 seconds: 127.5A

#### Charging Methods at 25°C(77°F)

|                            |                |
|----------------------------|----------------|
| Maximum Charging Current : | 2.55A          |
| Standby use:               |                |
| Float Charging Voltage     | 13.5 to 13.8V  |
| Coefficient                | -3.0mV/°C/cell |

#### Operating Temperature Range

|           |            |    |             |
|-----------|------------|----|-------------|
| Charge    | -15°C(5°F) | to | 40°C(104°F) |
| Discharge | -15°C(5°F) | to | 50°C(122°F) |
| Storage   | -15°C(5°F) | to | 40°C(104°F) |

#### Charge Retention (shelf life) at 20°C(68°F)

|         |     |
|---------|-----|
| 1 month | 92% |
| 3 month | 90% |
| 6 month | 80% |

#### Case Material

ABS UL94 HB  
Option: Flammability resistance of (UL94 V-0)

#### Design Life & Standard

Expected Trickle Design Life: 6-9 years at 20°C according to Eurobat.

#### Terminal

F2 (Faston Tab 250)

For standby power supplies



### Dimensions

#### Length (L)

151±1 (5.94±0.04)

#### Width (W)

65±1 (2.56±0.04)

#### Height (H)


94±1 (3.70±0.04)

#### Overall Height (HT)


102±1 (4.02±0.04)

#### Description of torque value of hard ware for the terminals:


mm(inch)

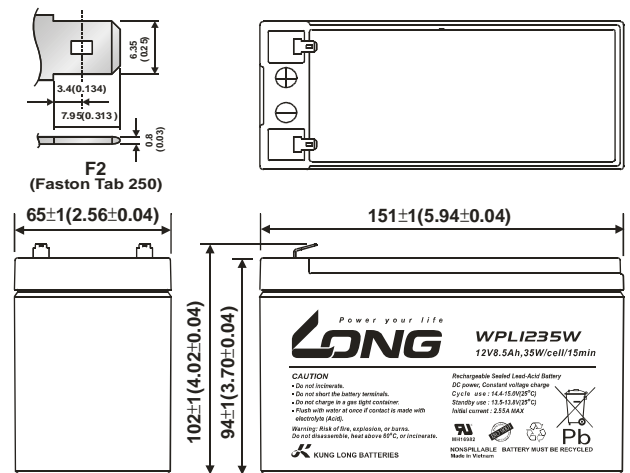


#### Discharge Time VS. Discharge Current (25°C)

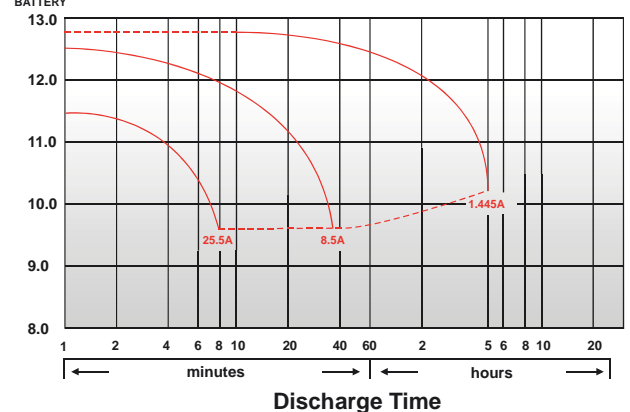


Effect of Temperature on Capacity 25°C(77°F)

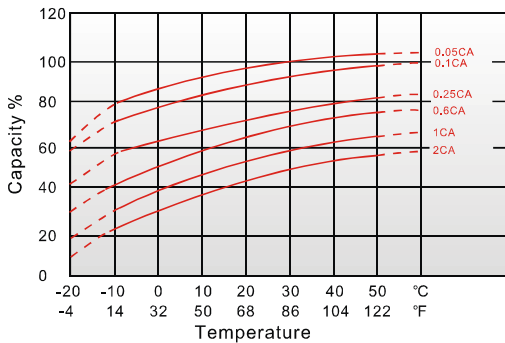

Capacity Retention Characteristic

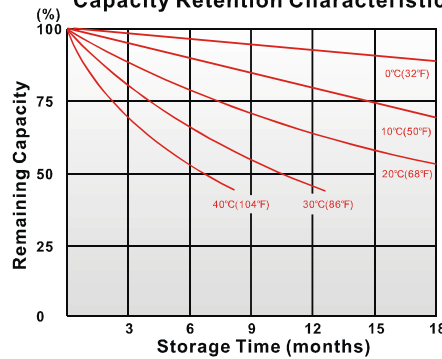

Trickle (or float) Service Life

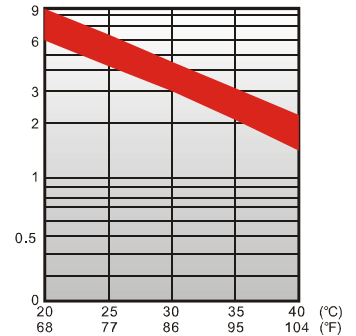

### - PERFORMANCE DATA

#### Discharge Rates in Watts to Various End Voltages at 25°C(77°F)

| End Voltage |     | 1.85V | 1.80V | 1.75V | 1.70V | 1.65V | 1.60V |
|-------------|-----|-------|-------|-------|-------|-------|-------|
| Time        |     |       |       |       |       |       |       |
| 5           | min | 55.8  | 59.7  | 64.1  | 67.1  | 70.4  | 73.8  |
| 10          | min | 35.8  | 38.3  | 41.1  | 43.1  | 45.2  | 47.3  |
| 15          | min | 27.4  | 28.7  | 30.3  | 31.7  | 33.1  | 34.5  |
| 30          | min | 15.7  | 16.4  | 17.3  | 18.2  | 19.0  | 19.8  |
| 60          | min | 9.76  | 10.1  | 10.3  | 10.4  | 10.5  | 10.7  |
| 120         | min | 5.15  | 5.32  | 5.44  | 5.50  | 5.56  | 5.67  |
| 180         | min | 4.15  | 4.29  | 4.38  | 4.43  | 4.48  | 4.57  |
| 240         | min | 3.33  | 3.44  | 3.52  | 3.56  | 3.60  | 3.65  |
| 300         | min | 2.83  | 2.93  | 2.99  | 3.02  | 3.05  | 3.06  |
| 600         | min | 1.59  | 1.64  | 1.68  | 1.69  | 1.70  | 1.71  |
| 1200        | min | 0.836 | 0.865 | 0.884 | 0.893 | 0.903 | 0.910 |

#### - Discharge Rates in Amperes to Various End Voltages at 25°C(77°F)

| End Voltage |     | 1.85V | 1.80V | 1.75V | 1.70V | 1.65V | 1.60V |
|-------------|-----|-------|-------|-------|-------|-------|-------|
| Time        |     |       |       |       |       |       |       |
| 5           | min | 29.9  | 32.0  | 34.3  | 36.0  | 37.7  | 39.5  |
| 10          | min | 18.7  | 20.0  | 21.5  | 22.5  | 23.6  | 24.7  |
| 15          | min | 14.0  | 14.6  | 15.5  | 16.2  | 16.9  | 17.6  |
| 30          | min | 7.92  | 8.28  | 8.75  | 9.16  | 9.57  | 9.98  |
| 60          | min | 4.90  | 5.07  | 5.18  | 5.24  | 5.27  | 5.29  |
| 120         | min | 2.57  | 2.66  | 2.72  | 2.75  | 2.77  | 2.78  |
| 180         | min | 2.06  | 2.13  | 2.18  | 2.21  | 2.22  | 2.23  |
| 240         | min | 1.65  | 1.71  | 1.75  | 1.76  | 1.77  | 1.78  |
| 300         | min | 1.40  | 1.45  | 1.48  | 1.50  | 1.51  | 1.52  |
| 600         | min | 0.784 | 0.811 | 0.829 | 0.838 | 0.842 | 0.847 |
| 1200        | min | 0.413 | 0.427 | 0.436 | 0.441 | 0.443 | 0.446 |

All data on the spec. sheet is an average value:

The tolerance range :  $X < 6\text{min}$ (+15%~-15%),  $6\text{min} \leq X < 10\text{min}$ (+12%~-12%),  $10\text{min} \leq X < 60\text{min}$ (+8%~-8%),  $X \geq 60\text{min}$ (+5%~-5%)

011019-1K